

Resistive Human Machine Interface Series

Module : **TML-D070**

Overview

- Plastic enclosure, low cost, high reliability.
- The main board is treated with a special coating (three anti-paint) to adapt to harsh environment.
- High resolution, high brightness, LED backlight, More energy saving and environmental protection.
- The USB host port supports USB memory to storage and download data.
- 4-way serial port, with Ethernet port, more powerful expansion function.
- New configuration software, rich library, powerful features.


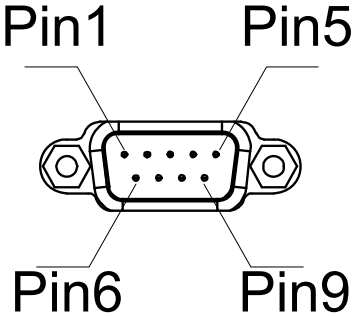
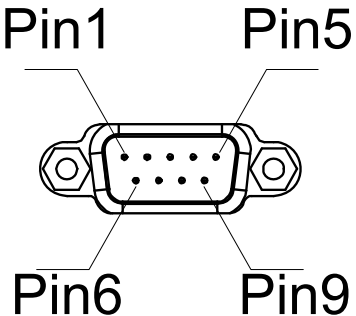

Appearance



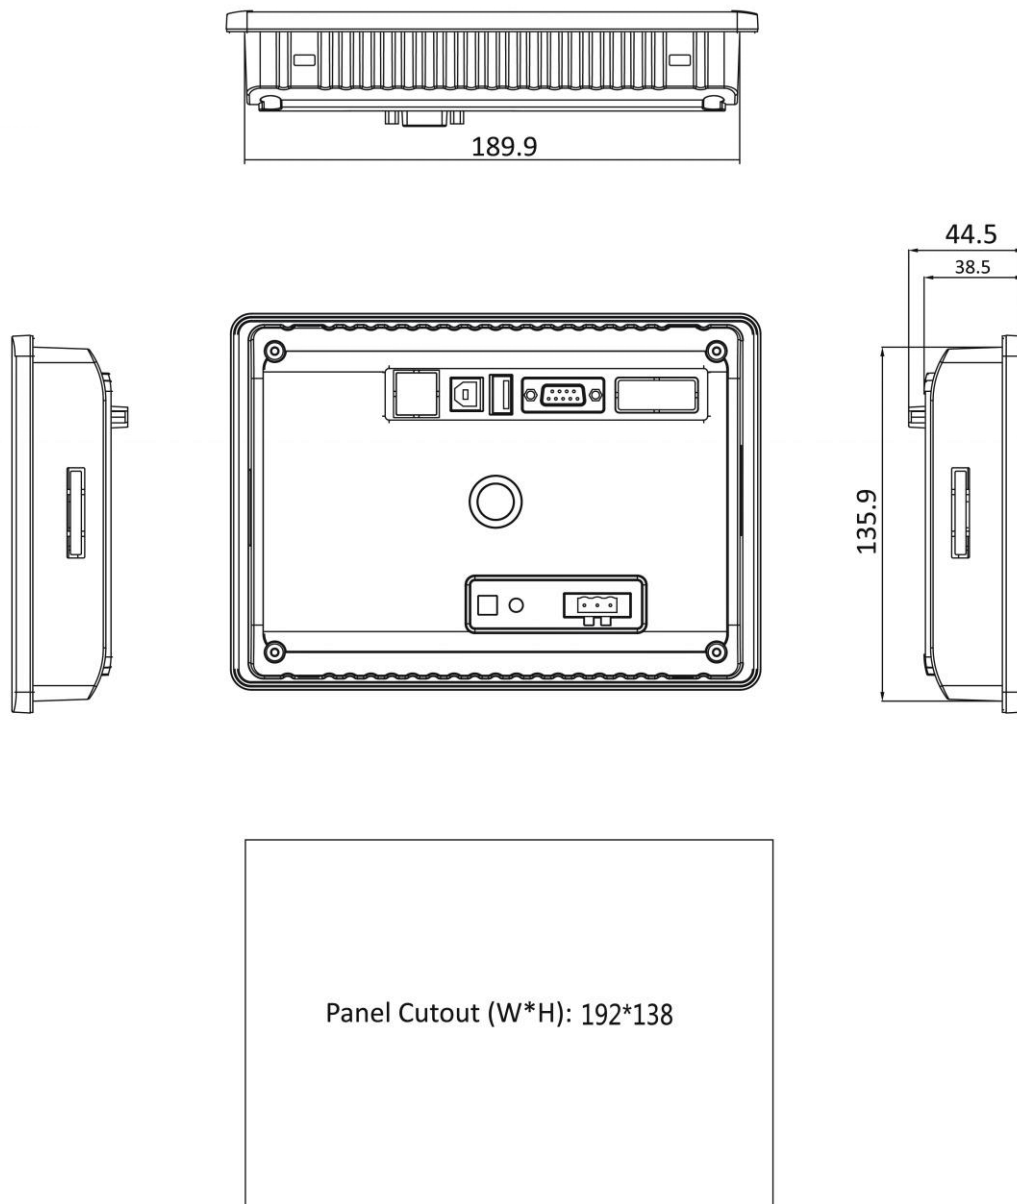
Specifications

Hardware Parameter	Display	7" 16:9 TFT LCD
	Resolution(WxH)	800×480
	Colors	24-bit
	Brightness	360 cd/m ²
	Backlight	LED
	LCD Life	50000 hours
	Touch Panel	4 wires resistive touch screen
	CPU	600MHz ARM Cortex-A8
	Memory	128M Flash + 128M DDR3
	RTC	Built in
	SD Card	Available
	Ethernet	10M/100M adaptive
	USB Port	USB Slave 2.0 Port*1, USB Host 2.0 Port*1
	Download Project	USB Slave port/USB memory/Ethernet/SD Card
	COM Port	COM1/COM2: RS232/RS485/RS422, COM3/COM4: RS232
	LCDviewing angle (T/B/L/R)	50°/70°/70°/70°
Electrical Specifications	Power Consumption	< 10W
	Input Power	DC24V,Working range: DC 9V~28V
	Power Protection	Protectedfrom thunder strike and surging
	Power Down Allowed	< 5mS
	CE & ROHS	Complied with EN61000-6-2:2005, EN61000-6-4:2007,ROHS, Surge Immunity:±1KV, EFT:±2KV; ESD:4KV,Air:8KV
Environmental Requirements	Operating Temperature	0~50℃
	Storage Temperature	-20~60℃
	Anti-UV	Not suitable to work in strong ultraviolet light (such as direct sunlight)
	Operating Humidity	10~90%RH (no condensate)
	Vibration Endurance	10~25Hz(X, Y, Z direction 2G/30minutes)
	Cooling	Natural Air Cooling
Mechanical Index	Degree of Protection	Front IP65(with NEMA panel, Back IP20)
	Enclosure	Engineering plastic
	Panel Cutout	192mm×138mm
	Dimension	204mm×145mm×44.5mm
	Weight	About 600g

Wiring definition

Power Terminal (Pin1~3 from left to right)		
	Pin1	FG
	Pin2	0V
	Pin3	DC24V
DB9 Serial Terminal(COM1/COM3)		
	Pin1	Rx-(B)
	Pin2	RxD (COM1 RS232)
	Pin3	TxD (COM1 RS232)
	Pin4	Tx-
	Pin5	GND
	Pin6	Rx+(A)
	Pin7	RxD (COM3 RS232)
	Pin8	TxD (COM3 RS232)
	Pin9	Tx+
(COM2/COM4)		
	Pin1	Rx-(B)
	Pin2	RxD (COM2 RS232)
	Pin3	TxD (COM2 RS232)
	Pin4	Tx-
	Pin5	GND
	Pin6	Rx+(A)
	Pin7	RxD (COM4 RS232)
	Pin8	TxD (COM4 RS232)
	Pin9	Tx+
USB Host		
	USB Type A	Used to connect USB memory, scan code gun and other peripherals
USB Slave		
	MicroUSB	Used to download programs and debug
Ethernet Port		
	RJ45	Used to set Ethernet with controller or connect to server

Size TML-D070



Contact Us

Shanghai

HANYOUNG NUX Electronics(Shanghai)Co., Ltd

No. 168, Jinlou Road, Jiading Industrial North Zone, Shanghai 201807, P.R.CHINA

Tel: +86 21 5954 7598

Fax: +86 21 5954 7738

Incheon

HANYOUNG NUX Co., Ltd

No. 28, Gilpa-ro 71 beon gil, Michuhol gu, Incheon, Korea

Tel: +82 32 867 0941

Fax: +82 32 868 5899